



۳. همانند تصویر زیر ابتدا کولر را بر روی پراکت مخصوص قرار دهید سپس با یک دست، گیره فلزی مخصوص را درون زائده تعبیه شده بر روی پراکتی که بر روی مادربورد نصب کرده‌اید استاندارد (شکل A) و در نهایت با حفظ همین وضعیت با دست دیگر گیره دوم فلزی را درون زائده دوم پراکت قرار دهید (شکل B).

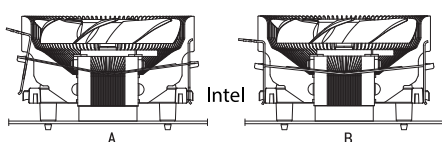


۴. در نهایت کانکتور ۴ پین فن کولر را بر روی سوکت فن CPU بر روی مادربورد نصب کنید.




راهنمای نصب بر روی سوکت های AMD Socket AM5/AM4/AM3+/AM3/AM2+/AM2/FM1/FM2/FM2+

۱. همانند تصویر زیر ابتدا کولر را بر روی پراکت مخصوص قرار دهید سپس با یک دست، گیره فلزی مخصوص را درون زائده تعبیه شده بر روی پراکت مادربورد استاندارد و در نهایت با حفظ همین وضعیت با دست دیگر گیره دوم فلزی را درون زائده دوم پراکت مادربورد قرار دهید.




۲. در نهایت کانکتور ۴ پین فن کولر را بر روی سوکت فن CPU بر روی مادربورد نصب کنید.



توجه: قبل از نصب این کولر بر روی سیستم، از تناسب توانایی این کولر برای خنک کردن نوع پردازنده مد نظر مطمئن شوید.


اطلاعات اولیه

۱. ابتدا هر گونه گرد و خاک و یا ذرات باقی مانده از خمیرهای حرارتی قبلی را با دقت و با استفاده از یک دستمال خشک از روی سطح IHS پردازنده پاک کنید. سپس یک لایه نازک از خمیر حرارتی مخصوص را بر روی سطح IHS پردازنده و BASE کولر به صورت یکپارچه پخش کنید.

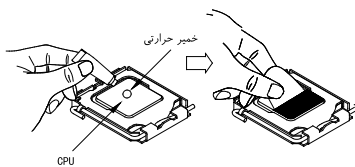

راهنمای نصب بر روی سوکت های Intel LGA 1200/1150/1151/1155/1156/1700


۱. قبل از نصب پراکت نگه دارنده کولر بر روی مادربورد ابتدا گیره تعبیه شده بر روی آن را با توجه به سوکت پردازنده (LGA1700 یا LGA115X) بر روی جهت صحیح تنظیم کنید.



Intel LGA 1200/1150/1151/1155/1156

Intel LGA 1700

۲. پس از نصب پراکت بر روی مادربورد در نهایت با قرار دادن پین‌های فشاری بر روی گیره‌ها و اعمال فشار بر روی آن‌ها پراکت بر روی مادربورد محکم می‌شود.




GREEN
www.green.ir

TINYCOOL 90
Rev 1.1

راهنمای کاربر

محتویات

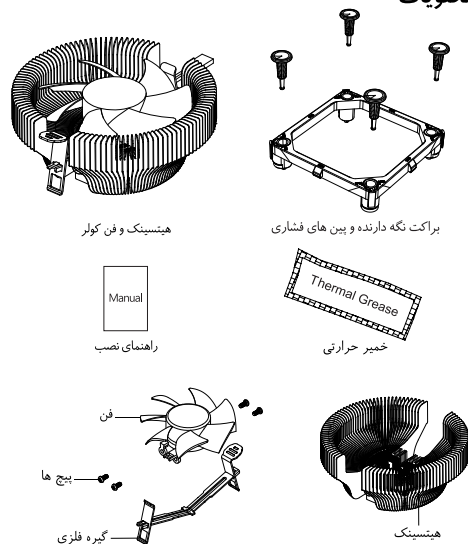


مشخصات فنی

ابعاد هیتسینک : 112 (L) x 108 (W) x 53 (H) mm
وزن : 211 g
سایز فن : 90 x 90 x 25 (H) mm
نوع فن : Hydraulic
ولتاژ کاری فن : DC-12 V
جداکنر جریان فن : 0.21 A (MAX)
جریان هوا : 43.4 CFM
توزع صوتی : 22.0 dBA (Max)
سرعت چرخش فن : 2000 RPM $\pm$ 10%

TINYCOOL 90
Rev 1.1

GREEN
www.green.ir

User's Manual

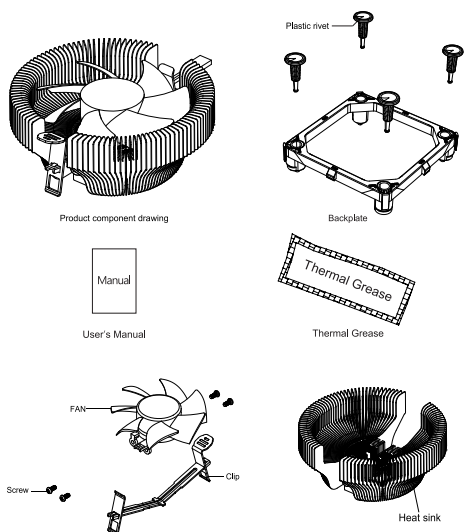


Specifications

Dimensions : 112 (L) x 108 (W) x 53 (H) mm
Weight : 211 g
Fan size : 90 x 90 x 25 (H) mm
Bearing type : Hydraulic
Rated voltage : DC 12 V
Rated current : 0.21 A (MAX)
Air flow : 43.4 CFM
Noise : 22.0 dBA (Max)
Speed : 2000 RPM $\pm$ 10%

Before installation, please confirm that the CPU cooler is suitable to cool down the heat of your individual CPU model.


Basic information:

1. Please make sure that the thermal paste is evenly distributed on the top of your CPU in case it has not already been applied to the cooler heat sink bottom directly.

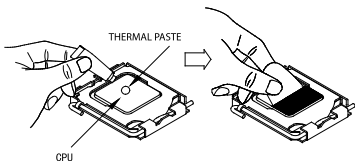

Intel LGA1700 socket mainboard installation instructions

1. Please push plastic pin A to the 1700 mark direction as shown on picture 1-1.
2. Confirm that the direction of the 4 plastic pins is right, then press the whole set of plastic clips into the installation hole on the motherboard, then insert the plastic rivets to fix them as shown on picture 1-2.

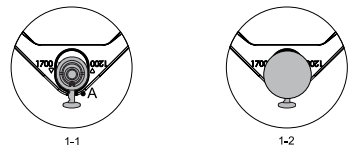


1-1

1-2


Intel LGA 1200/1150/1151/1155/1156 socket mainboard installation instructions

1. Please pull plastic pin A to the 115X mark direction as shown on picture 1-1.
2. Confirm that the direction of the 4 plastic pins is right, then press the whole set of plastic clips into the installation hole on motherboard, then insert the plastic rivets to fix them as shown on picture 2-2.

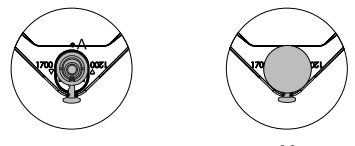

2-1


2-2

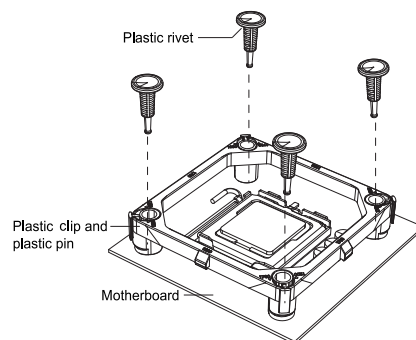

3. Connect the fan cable connector to the power socket on the motherboard where marked as „CPU FAN“. Start your computer and check if everything works properly and if the CPU is properly cooled, then finish installation.

AMD Socket AM5/AM4/AM3+/AM3/AM2+/AM2/FM1/FM2/FM2+ socket mainboard installation instructions

1. Put the CPU cooler to the center of the plastic clip. Hitch the tail of the cooler clip to the plastic clip. Then move the other side of the cooler clip and hitch it to the other side of the plastic clip.



2. Connect the fan cable connector to the power socket on the motherboard where marked as „CPU FAN“. Start your computer and check if everything works properly and if the CPU is properly cooled, then finish installation.